


**NOTES:**

1. BASE MATERIAL SHALL BE 4" OF 3/4 INCH MINUS CRUSHED AGGREGATE BASE MATERIAL COMPACTED 95% MAXIMUM DENSITY AS DETERMINED BY MODIFIED PROCTOR AS PER AASHTO T180. ALL FILL OR BACKFILL AREAS SHALL BE PLACED IN 6" LIFTS.
2. PLACEMENT OF DRAINAGE STRUCTURES JUNCTION BOXES OR OTHER OBSTRUCTIONS IN FRONT OF DRIVEWAY ENTRANCES IS PROHIBITED.
3. THIS RAMP SHALL BE USED WITH HIGH BACK AND ROLLED CURB.

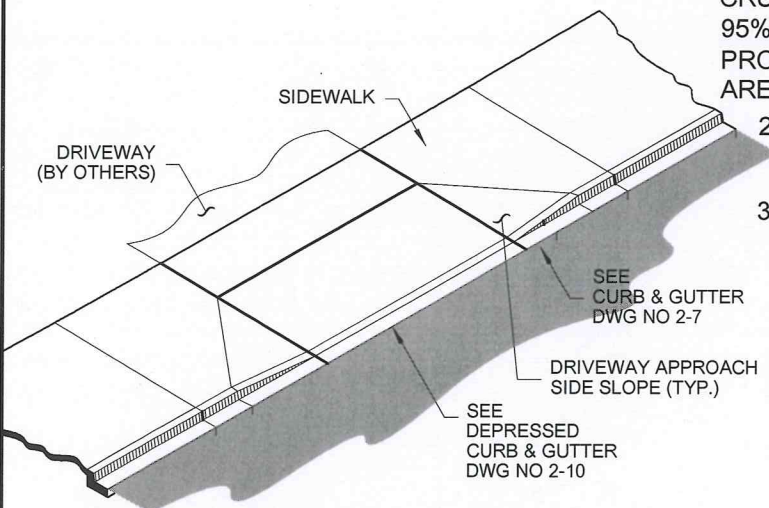

4. ALL ALLEYS, COMMERCIAL DRIVEWAYS AND PRIVATE ROADWAYS ACCESSING MORE THAN THREE DWELLING UNITS WILL BE REQUIRED TO PLACE 3 - # 4 REBARS WITHIN CURB & GUTTER (CENTER AND 9" OFF CENTER) OF THE DRIVEWAY APPROACH.

M:\Standards\2010-Standards\2-Concrete\Wide Driveway.dwg

CITY OF LEWISTON, IDAHO PUBLIC WORKS DEPARTMENT	
<b>DRIVEWAY APPROACH WIDE SIDEWALK</b>	
APPROVED FOR PUBLICATION <i>Sharon Stehler</i> 2/26/13 City Engineer	DWG. NO. <b>2-19</b>
Date	