

| RADIUS AT FACE OF CURB     | E            | F           |
|----------------------------|--------------|-------------|
| 20 FEET                    | 10' - 4 3/4" | 3' - 8 1/2" |
| 25 FEET                    | 9' - 8 1/4"  | 3' - 6"     |
| 30 FEET                    | 8' - 11 1/2" | 3' - 2 1/4" |
| DIMENSIONS AT FACE OF CURB |              |             |


**SECTION A**

SIDEWALK RAMP TYPE 2 SHOULD NOT BE USED IN NEW CONSTRUCTION; ONLY TO BE USED WITH WRITTEN APPROVAL FROM PUBLIC WORKS DEPT.

**NOTES:**

1. DETECTABLE WARNING PATTERN TILE SHALL BE YELLOW TRUNCATED-DOME TYPE.
2. RAMP SLOPES SHALL NOT BE STEEPER THAN 12H:1V.
3. A 4' x 4' LANDING AT THE BOTTOM OF THE RAMP WITH 2% SLOPE IN ALL DIRECTIONS.
4. PLACEMENT OF DRAINAGE STRUCTURES, JUNCTION BOXES OR OTHER OBSTRUCTIONS WITHIN/ OR FRONT OF RAMP OR LANDING IS PROHIBITED.
5. THIS RAMP SHALL BE USED WITH HIGH BACK AND ROLLED CURB.

**SECTION C**

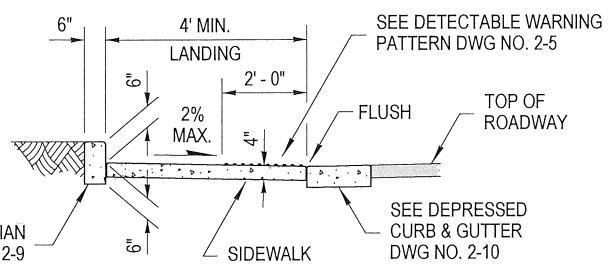

**SECTION B**

CITY OF LEWISTON, IDAHO  
PUBLIC WORKS DEPARTMENT

**SINGLE OR DOUBLE  
SIDEWALK RAMP TYPE 2**

|   |                |                  |
|---|----------------|------------------|
| APPROVED FOR PUBLICATION<br><i>Shawn Stull</i><br>City Engineer | Date<br>3/9/17 | DWG. NO.<br>2-12 |
|---|----------------|------------------|